

MONITOR 63GQ PUMP

PUMPS



Self-priming pump for solids handling applications

For more than 60 years the name GTI has been synonymous worldwide with innovation and reliability for pumping technology

GTI is an innovative and efficient centrifugal pump technology company that offers operators of Pump Systems and a wide range of quality products. GTI is committed to global excellence with a complete range of Pumps, Fire Pump Packages and related products, such as Decoking Systems and Tools to support the core markets, namely Oil & Gas, Petrochemical, Power, Heavy Industry Applications, Mining and Water Services.

The broad product line complies with the most demanding quality specifications and goes beyond stringent industry standards such as Hydraulic Institute, Underwriter's Laboratories.

GTI is a vertically integrated company with its own foundry, machine shop, pumps manufacturing plants and service centers. With strategically located manufacturing plants, operating offices and service centers in many parts of the world is truly a global pump company which also has the strength to focus on the local necessities of each client.


Monitor 63GQ Self Priming Pumps

The Monitor 63GQ line is a self priming pump that can handle clear liquids or with solids. Its large volute design allows automatic repriming in a completely open system without the need for suction or discharge check valves.

These type of pumps are designed to allow a simplified maintenance of the pump with the use of common hand tools and having easy access to its interior parts such as

the impeller and the seal for a simple maintenance therefore reducing operating costs.


These pumps are ideal for waste handling applications and sewage handling applications in industries such as paper, agricultural, construction, automotive, and many others.

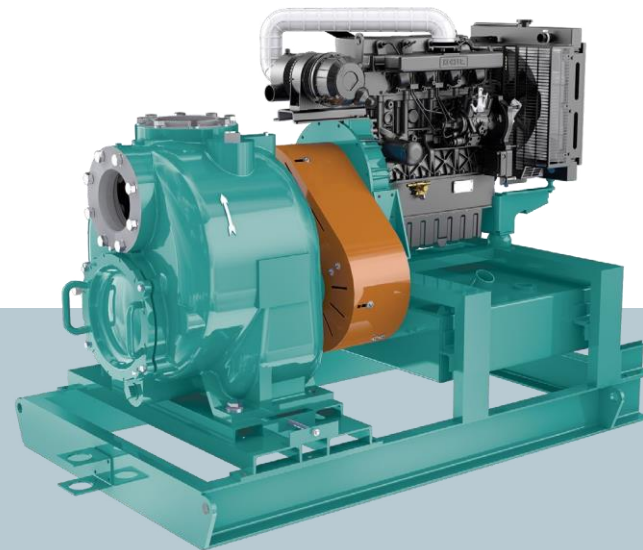

THE MONITOR 63GQ PUMPS CAN

Removable Rotating Assembly


Pusher bolt holes allow for removal of the rotating assembly without disturbing the piping.

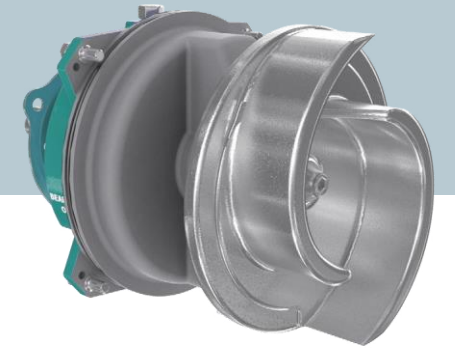

Selection Chart

Selection Chart SWP

Various Poles
50 & 60 HZ

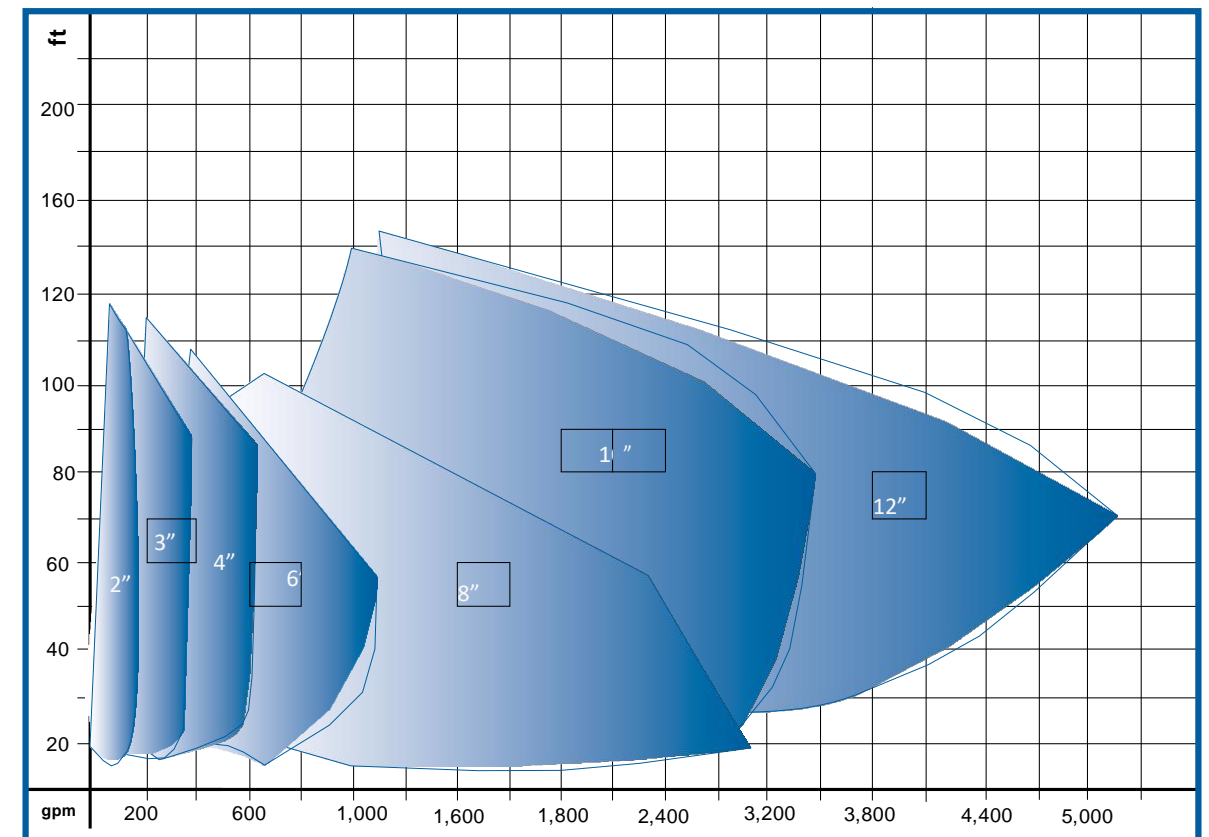

Characteristics

1 Discharge Flange
Up to 8"

2 Suction Check Valve
Rubber that avoids the priming chamber to empty

3 Removable Cover Plate
Allows easy maintenance to remove solids that may build up during operation

4 Handles
Allow the complete rotation of the removable cover plate

5 Wearplate
Easy to replace

6 O-Ring Seal
Divides the self priming pressure from the discharge pressure

7 Balanced Impeller
Two vane semi open impeller that can handle up to 3" solids


12 Mechanical Seal
Oil lubricated

11 Double Lip Seals
For isolating bearing brackets from mechanical seal chamber

10 Breather
Release gases that can be formed in lubricating oil. Communicates with atmospheric pressure

9 Oil Sight
For a control of the oil level for the bearing lubrication

8 Pusher Bolt Capability

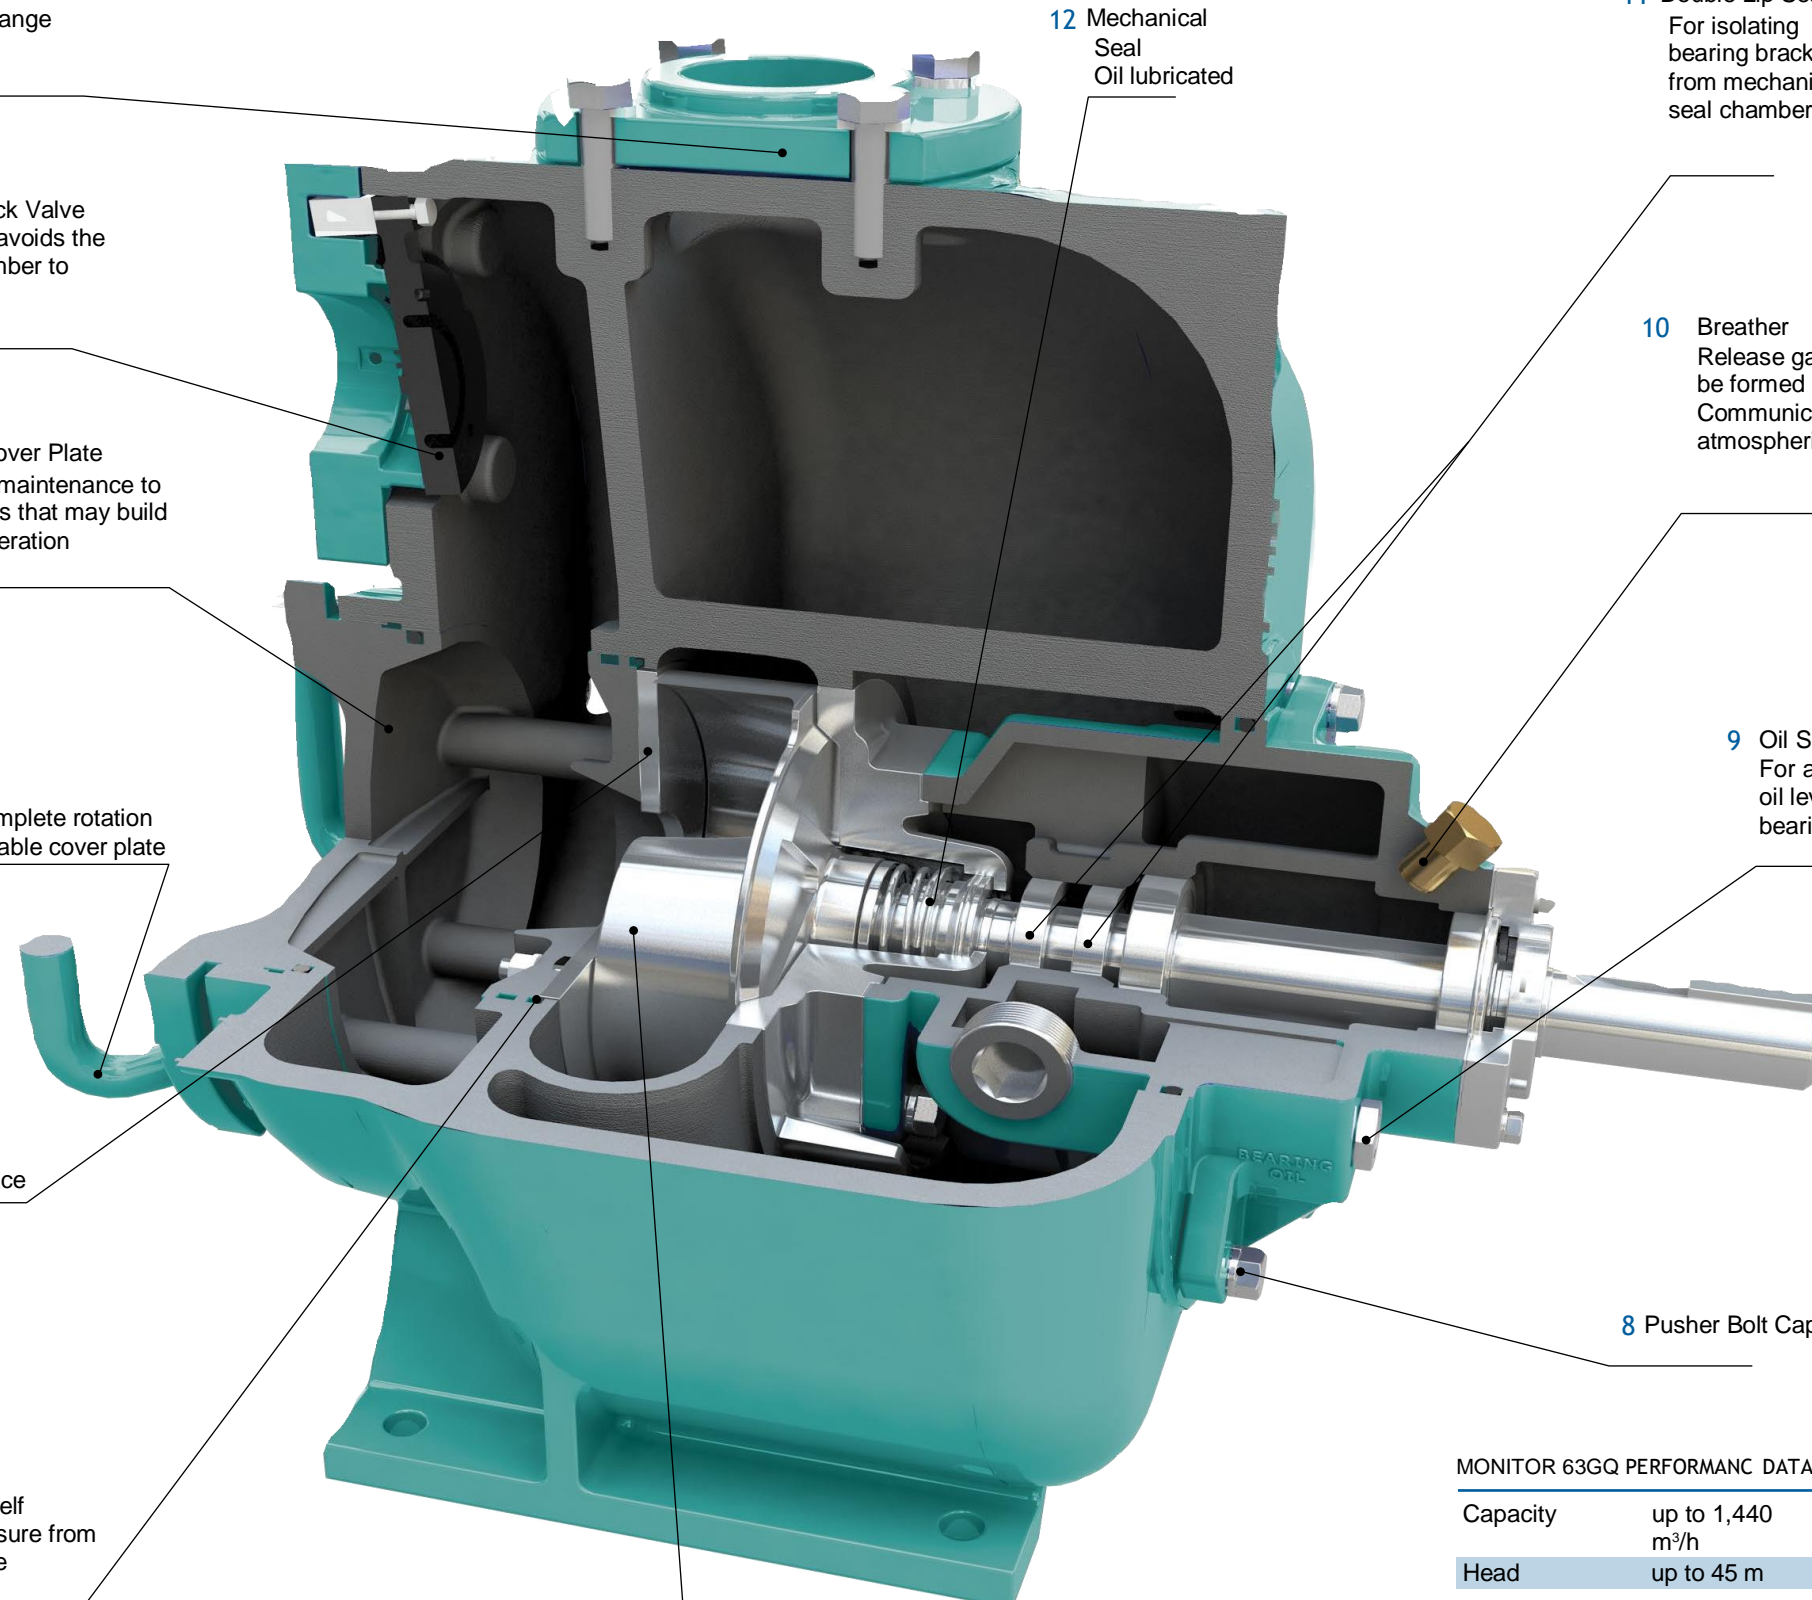

MONITOR 63GQ PERFORMANC DATA

Capacity	up to 1,440 m ³ /h	5,280 U.S. gpm
Head	up to 45 m	147 ft
Solids Diameter	up to 7.62 cm	up to 3 in
Lift	up to 8.2 m	up to 27 ft
Temperature	up to 70 °C	up to 158 °F

Note: For Pump operation outside this range

Description

PRODUCT DESCRIPTION

- Self Priming Pump
- Easy maintenance without the need of disconnecting piping
- Easy access to impeller and seal.
- Availability of mounting above the liquid being pumped.
- Designed to allow up to 3 inch diameter solids.
- Lift up to 27 ft

BROAD APPLICATION RANGE

The Monitor 63GQ Pump pump is designed for a wide range of waste handling applications for industries such as but not limited to:

- Steel
- Paper Mills
- Mining
- Food Processing
- Power Plants
- Automotive
- Wineries

MATERIALS OF CONSTRUCTION

Construction	Casted wetted parts	Hardware	Mechanical Seal
Cast Iron	Cast Iron	Steel	SS 316
Duplex	CD4MCu	SS 316	SS 316 (CD4MCu optional)
For other materials please contact GTI			

Handwritten notes area with horizontal lines.

REMOVABLE COVER PLATE

